


Thermal Barrier Datasheet

BB-80

ECD P/N: E54-0915-80

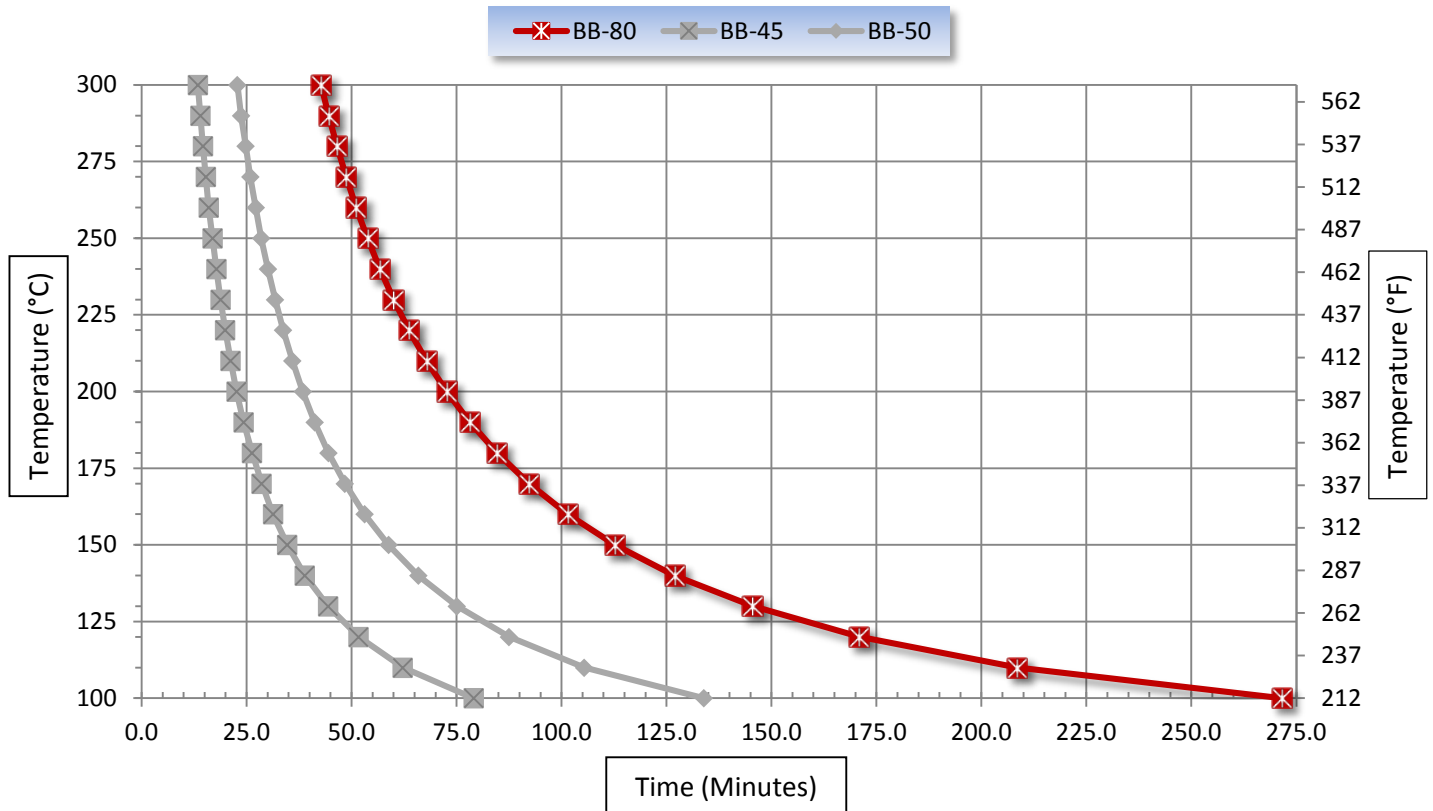

Temperature:	100°C [212°F]	150°C [302°F]	200°C [392°F]	250°C [482°F]	300°C [572°F]
Duration time:	271 min.	113 min.	73 min.	54 min.	43 min.
Max Operational Temp.:	The maximum operating temperature of the thermal barrier is 300°C [572°F]				
Handling Details:	This barrier includes a heat sink with phase change material (PCM) to absorb heat. Please make sure the canister is fully cooled to 15°C [59°F] before reuse.				



North & South America, Europe
 ECD World Headquarters
 4287-B SE International Way
 Milwaukie, Oregon 97222-8825 U.S.A.
 Tel: +1 503 659 6100 | + 1 800 323 4548
 Fax: + 1 503 659 4422
 E-Mail: sales@ecd.com | Web: www.ecd.com

ECD Asia/Pacific
 Singapore
 Mobile: +65 9692 6822
 Fax: +65 6241 9890
 E-Mail: ecd.asia@ecd.com


ECD Europe/Africa/Middle East
 Mobile: +48 512 659 100
 E-Mail: ecd.europe@ecd.com

- Top rated customer support • No-cost ECD Online Training • Award winning software •

Thermal Barrier Datasheet

BB-80

ECD P/N: E54-0915-80

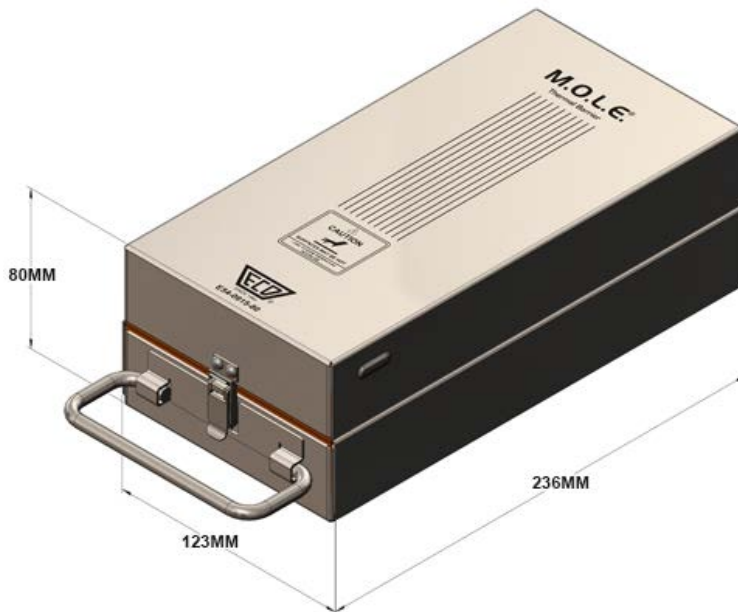

Barrier Dimensions:	Height:	Width:	Length:	Weight:
	80mm [3.15"]	123mm [4.7"]	236mm [9.3"]	4.1kg [8.95 lbs]

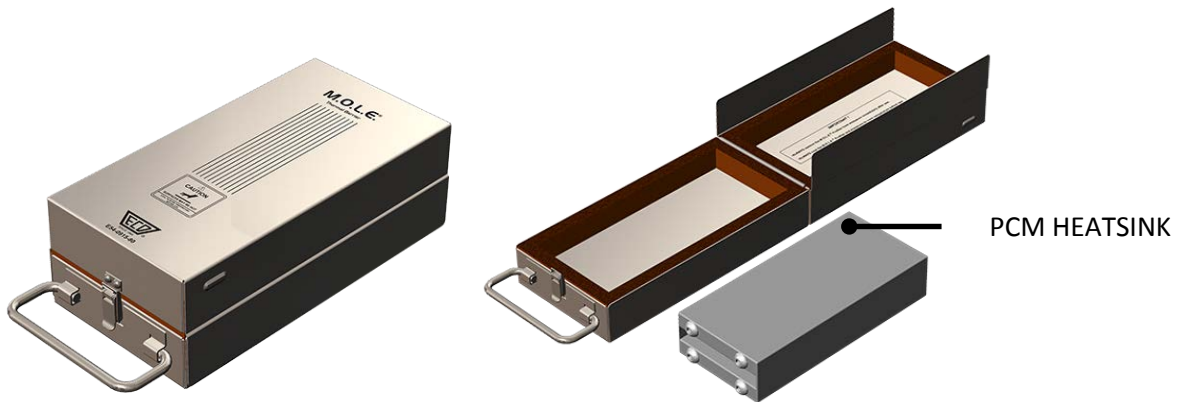


Figure 1 – External View

Figure 2 –Internal View



North & South America, Europe
 ECD World Headquarters
 4287-B SE International Way
 Milwaukie, Oregon 97222-8825 U.S.A.
 Tel: +1 503 659 6100 | + 1 800 323 4548
 Fax: + 1 503 659 4422
 E-Mail: sales@ecd.com | Web: www.ecd.com

ECD Asia/Pacific
 Singapore
 Mobile: +65 9692 6822
 Fax: +65 6241 9890
 E-Mail: ecd.asia@ecd.com

ECD Europe/Africa/Middle East
 Mobile: +48 512 659 100
 E-Mail: ecd.europe@ecd.com

- Top rated customer support • No-cost ECD Online Training • Award winning software •